



특징

측정가스 : Air, CO₂, N₂, N₂O, O₂, Argon

유량범위 : 0-50 SLPM

오차 : ± 1.5%

전원 : 8-24 VDC


출력 : 0.5 ~ 4.5 VDC, RS-232, RS-485

표시부 : L.E.D 순간유량, 토탈양

압력 : MAX 5Bar

온도 : -10℃ ~ 55℃

연결부 : BSPT 1/4"

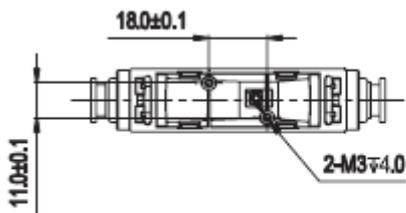

One-touch	L	D
ID=8mm	91.0	Φ8.0
ID=6mm	83.0	Φ6.0
ID=4mm	80.0	Φ4.0

